



City of South Euclid Building Department
 1349 South Green Rd
 South Euclid, Ohio 44121
 Tel. 216-381-0400 Fax 216-291-4959

Application for Fencing

Contractor/Applicant _____ Date _____

Project Address _____ Is this a corner house? _____

Owner's Name _____ Phone No. _____


Type & Height of Fence _____ Total lineal feet _____

Cost of Job _____ Check No. _____ Cash _____

* Please locate on the site plan below: the garage, driveway and side property lines. Res / Com'l

Fence must be 2 feet away from neighbor's driveway	Quan	Unit	Total
Fences (Base fee)		\$10.00/\$20.00	
+ Plus per each total linear feet up to 200 linear feet		\$10.00/\$20.00	
+ Plus per each total linear feet over 201 linear feet		\$20.00/\$30.00	

Back Property Line

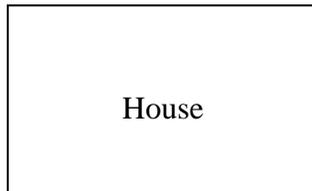

Front Property Line

Tax assessment – n/c	Total		

Telephone _____ Name (please print) _____

Fax _____ Signature _____

Email _____ Address _____

City, State, Zip Code _____

SPECIFICATIONS FOR FENCING



City of South Euclid Building Department
 1349 South Green Road
 South Euclid, Ohio 44121
 216-381-0400

INFORMATION
BULLETIN

FS-1

SEPTEMBER
2004

1. Wood posts must be pressure treated or made of a decay-resistant wood species (redwood, cedar, cypress, or locust).
2. Post holes shall be twice the diameter of the post. Eight inch diameter for 4" x 4" post and twelve inch diameter for a 6" x 6" inch post.
3. It is recommended that corner and gate posts have a wider footing for extra stability.
4. Place a 6" layer of compacted gravel into the bottom of each post hole.
5. After placing the concrete around post, provide a 1" to 2" rounded crown above grade to shed water.
6. Recommendation on vinyl fencing: corner and end posts should be reinforced. Install (2) #3 reinforcing bars with a separator clip at each end, fill post with concrete up to 6" from the top.
7. On post and board or picket fences three feet in height of less, post hole may be filled in with compacted gravel and dirt firmly tamped in lieu of concrete. This method will require vigorous tamping every 2 or 3 inches.
8. Post spikes are not permitted as a fence post support.
9. All post holes are required to be inspected prior to placing the post. You are required to contact the Building Department for a post hole inspection. For the inspection, all post holes will be observed for the correct depth and that the gravel has been placed in holes.

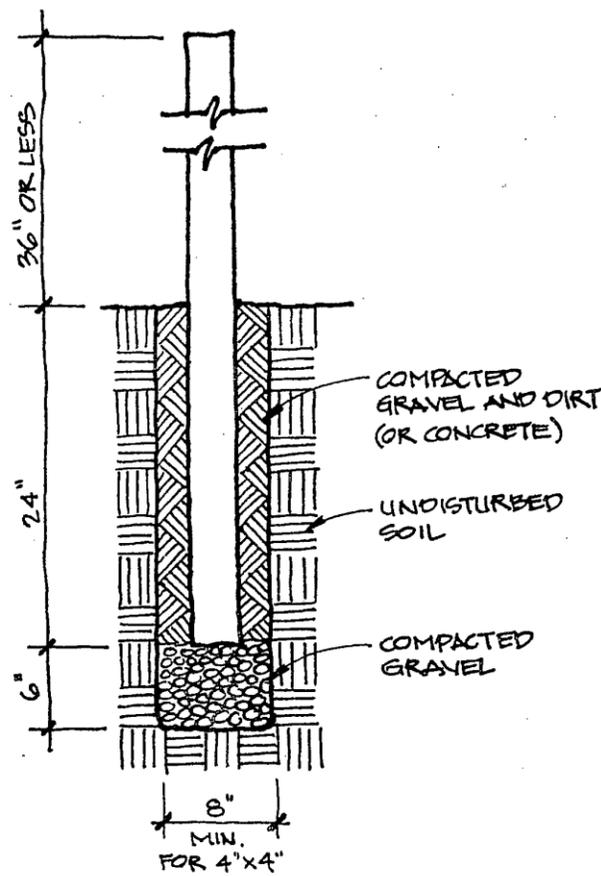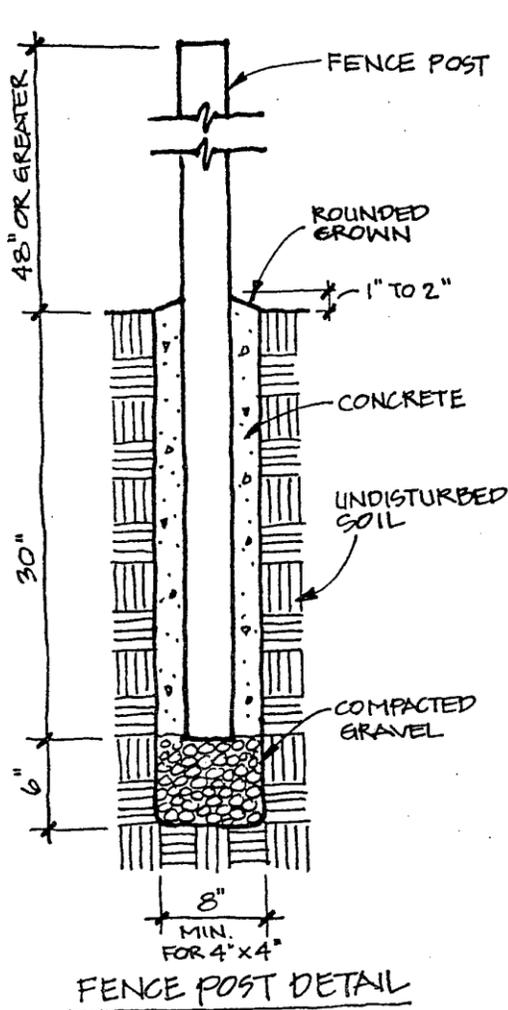

**FENCE POST DETAIL FOR
 PICKET OR POST AND BOARD
 FENCES 36" OR LESS**